


SCHOTTKY BARRIER RECTIFIER

Features

ITO-220AB




- ◆ High current capability
- ◆ Low forward voltage drop
- ◆ Low power loss, high efficiency
- ◆ High surge capability
- ◆ High temperature soldering
- ◆ guaranteed Mounting position: any

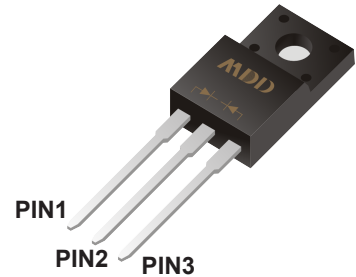

Mechanical Data

- Case : JEDEC ITO-220AB Molded plastic body
- Weight : 0.07ounce, 2.1 grams
- Terminals: Lead solderable per MIL-STD-202, Method 208



Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MDD MBRF 4045CT	MDD MBRF 4060CT	MDD MBRF 40100CT	MDD MBRF 40150CT	MDD MBRF 40200CT	UNITS
Marking Code							
Maximum repetitive peak reverse voltage	V_{RRM}	45	60	100	150	200	V
Maximum RMS voltage	V_{RMS}	32	42	70	135	140	V
Maximum DC blocking voltage	V_{DC}	45	60	100	150	200	V
Maximum average forward rectified current (see fig.1)	$I_{(AV)}$	40.0					A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	250			200		A
Maximum instantaneous forward voltage at 20.0A	V_F	0.70	0.75	0.85	0.95		V
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ C$ $T_A=100^\circ C$	I_R	0.1					mA
		20.0	30.0	10.0			
Typical thermal resistance (NOTE 2)	$R_{\theta JC}$	3.0					$^\circ C/W$
Operating junction temperature range	T_J	-55 to +150					$^\circ C$
storage temperature range	T_{STG}	-55 to +150					$^\circ C$

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to case.

Ratings And Characteristic Curves

Fig.1 Typical Forward Current Derating Curve

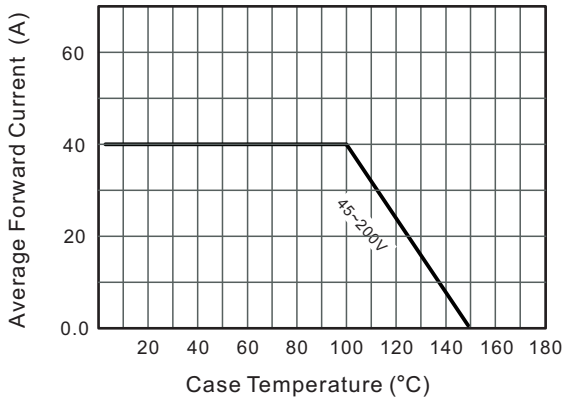


Fig.2 Typical Reverse Characteristics

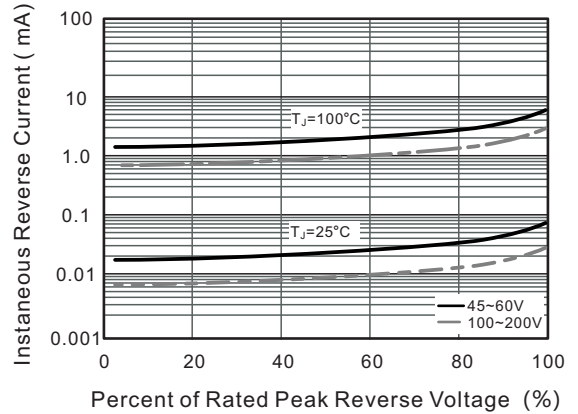


Fig.3 Typical Forward Characteristic(per leg)

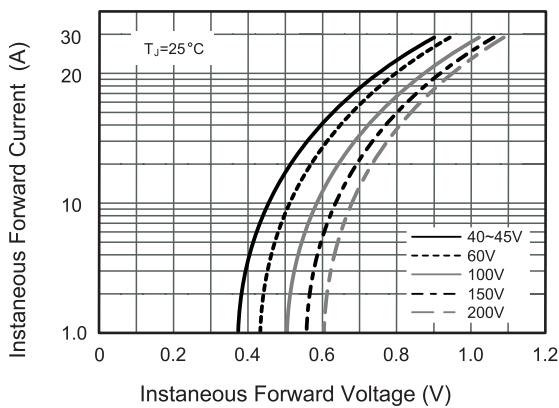


Fig.4 Typical Junction Capacitance

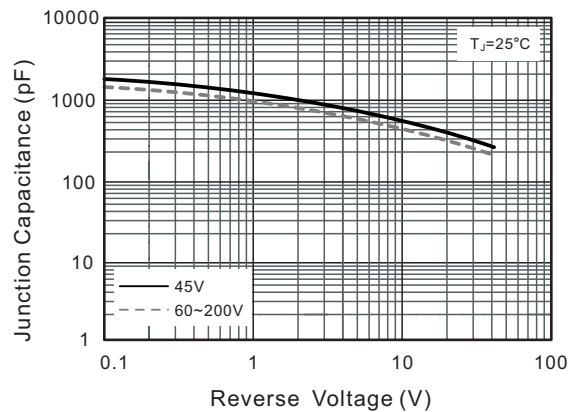


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


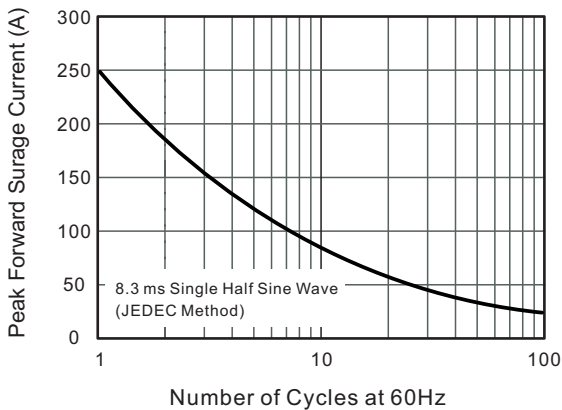



Fig.6- Typical Transient Thermal Impedance

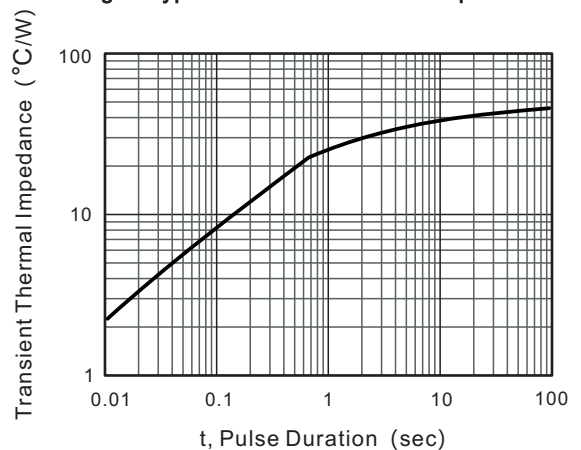

The curve above is for reference only.

Outline

ITO-220AB Package Outline Dimensions

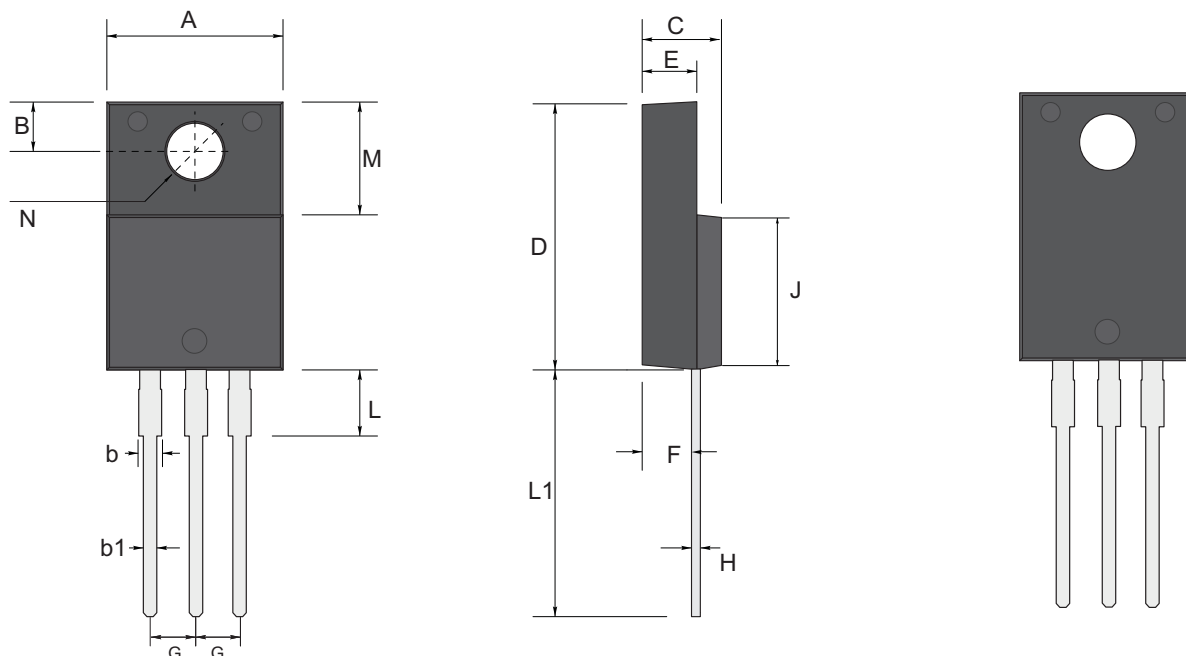

UNIT		A	B	b	b1	C	D	E	F	G	H	L	L1	M	N
mm	max	10.5	3.3	1.5	1.0	4.9	16.2	2.9	3.55	2.74	0.70	3.8	14.3	7.0	3.4
	min	9.6	2.54	1.1	0.5	4.3	14.7	2.4	2.56	2.34	0.30	2.3	12.0	6.3	3.0

Important Notice and Disclaimer

Microdiode Electronics (Shenzhen) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Microdiode Electronics (Shenzhen) makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Microdiode Electronics (Shenzhen) assume any liability for application assistance or customer product design. Microdiode Electronics (Shenzhen) does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Microdiode Electronics (Shenzhen).

Microdiode Electronics (Shenzhen) products are not authorized for use as critical components in life support devices or systems without express written approval of Microdiode Electronics (Shenzhen).